


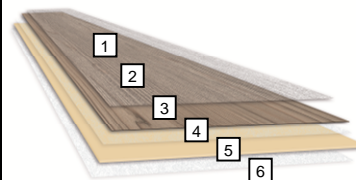
TECHNICAL CHARACTERISTICS




















PURLINE Organic Flooring | wineo 1000

Permanently elastic polyurethane flooring according to EN 16776
free of chlorine, solvents and plasticizers

wineo

 to glue	wineo 1000 wood	wineo 1000 stone
Format	1298 x 200 mm	862 x 402 mm
Product thickness	2.2 mm	2.2 mm
Weight	3.6 kg/m ²	3.6 kg/m ²
Planks / m² per box	20 / 5.19 m ²	14 / 4.86 m ²
Boxes / m² per pallet	48 / 249.12 m ²	50 / 243 m ²
Guarantee	10 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de	



Classification		Product composition	
 Utilization class 23 Heavy-duty use in the domestic area EN ISO 10874	Corridors, living rooms, kitchens, home offices	1	Surface texture various embossings
 Utilization class 32 Normal use in the commercial sector EN ISO 10874	Offices, boutiques, cafés	2	Top layer Polyurethane
 Wear resistance EN 660-2	Group T	3	Decor Decor paper
 Reaction to fire EN 13501-1	C _{fl} - s1	4	Stabilisation Glass fibre reinforcement
 Anti slip category DIN 51130	R 9	5	Base layer Polyurethane
 Slip resistance EN 13893	μ ≥ 0.30 – DS	6	Backing Fleece-TEC System
 Anti-static properties EN 1815	≤ 2 kV	 <p>windmüller flooring products WFP GmbH Nord-West-Ring 21 D-32832 Augustdorf</p> <p>Polyurethan Bodenbelag DOP: 2001001 EN 14041:2004 1658</p> <p>  Elastischer Bodenbelag zur Verwendung in Innenräumen.</p> 	
 Staining and chemical resistance EN ISO 26987	Very good resistance according to the concentration and residence time		
 Light fastness EN ISO 105-B02	≥ 7		
 Residual indentation EN ISO 24343-1	~ 0.05 mm		
 Effect of a furniture leg EN 424	Foot type 0 – no visible damage		
 Castor chair test EN 425 / ISO 4918	Type W – no visible change		
 Thermal resistance ISO 8302	0.01 (m ² K)/W		
 Impact sound reduction EN ISO 10140	~ 4 dB		
 Dimension stability EN ISO 23999	~ 0.10 %		
Flexural behaviour EN ISO 24344	< 20 mm		

Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by windmüller flooring products WFP GmbH.