

COREtec®

FLOORS

SUR-PLUS

Floors with attitude

EN

IT - SP - PT

Why choose a COREtec[®] floor?



1 Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.



3 100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all COREtec[®] floors come with a limited lifetime residential warranty.

2 Easy to maintain

Our high performance wear layers with which all our floors are coated, will make sure your floor is easy to maintain. Had an accident? Just wipe it off with a rag and it's gone.

In addition, the wear layers makes your floor even more scratch resistant and ready for intensive use.



4 Time saving solution


COREtec[®] is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



PRO CORE® - 5 mm

The original 100% waterproof floor, with extra dent & impact resistance

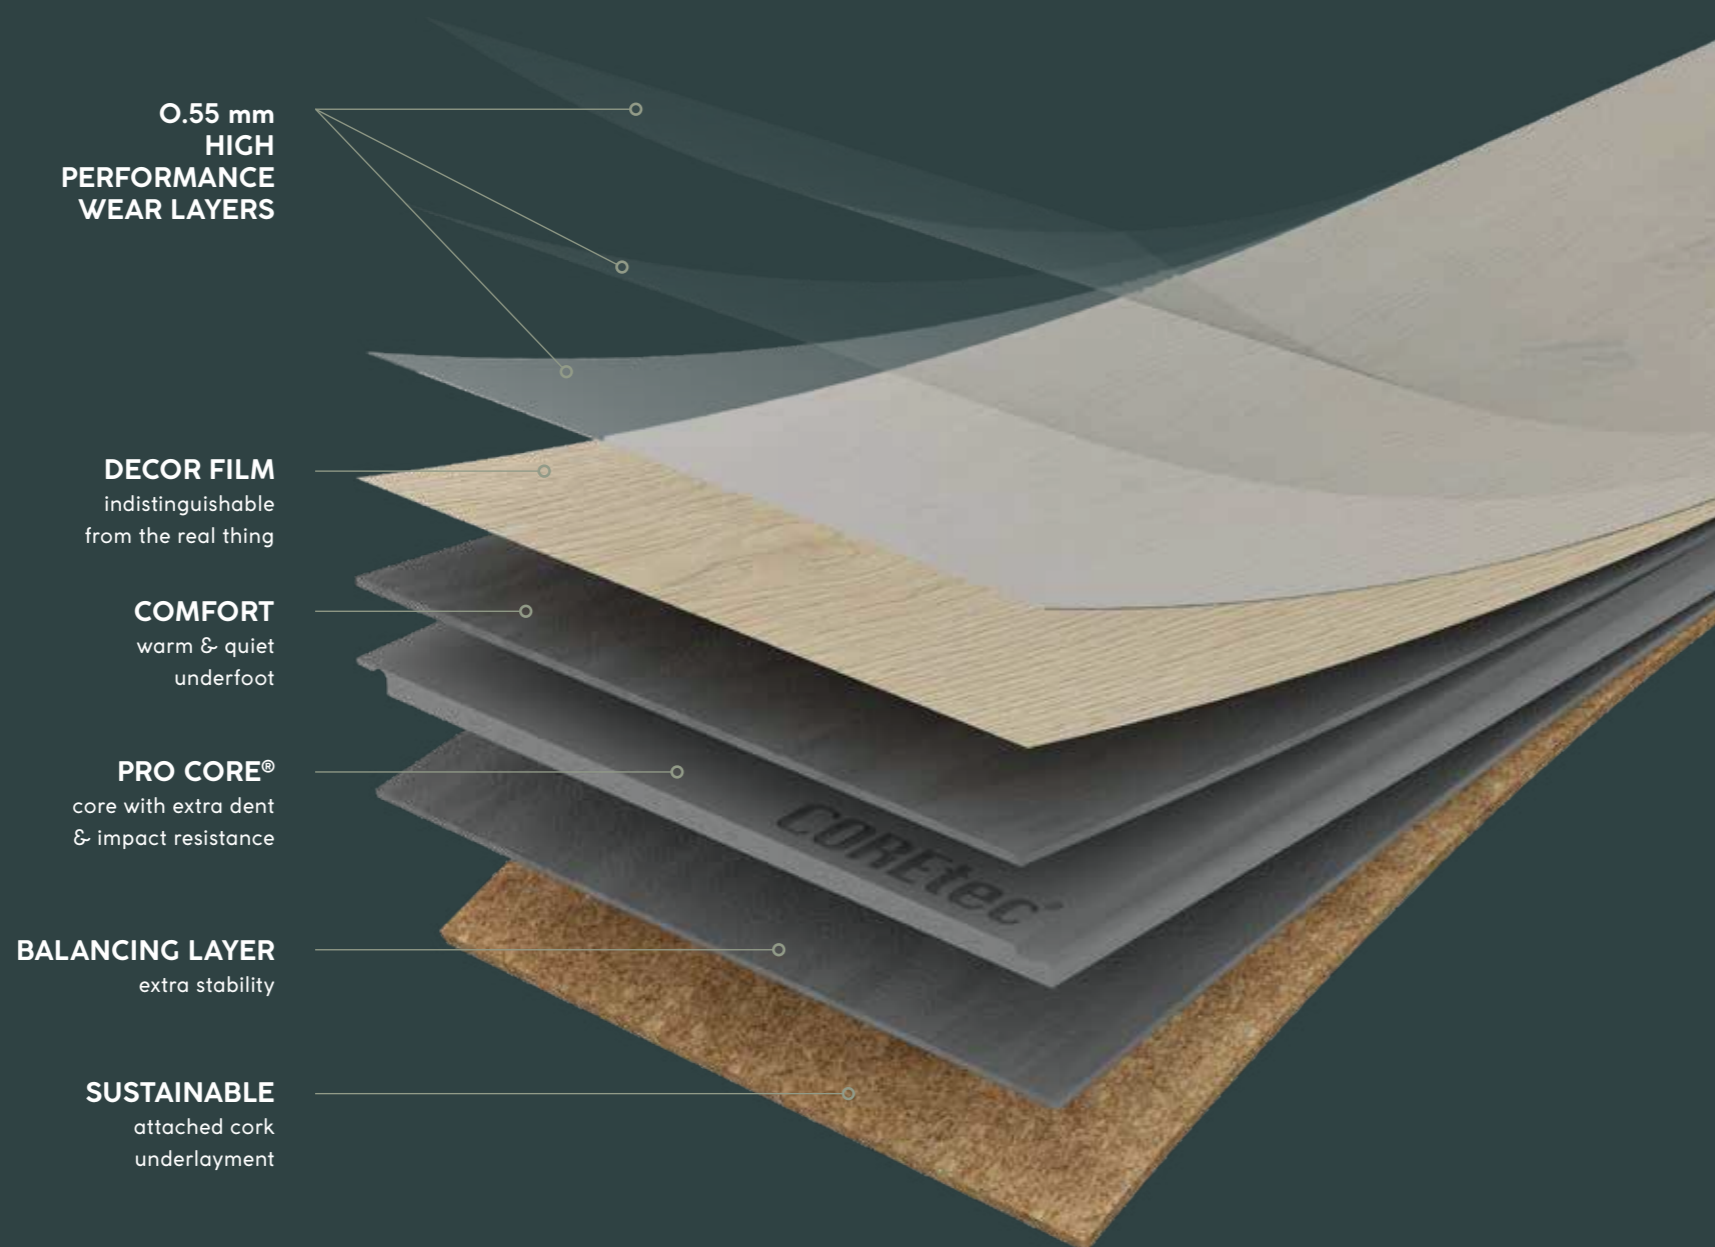

0.55 mm
HIGH
PERFORMANCE
WEAR LAYERS

DECOR FILM
indistinguishable
from the real thing

COMFORT
warm & quiet
underfoot

PRO CORE®
core with extra dent
& impact resistance

BALANCING LAYER
extra stability

SUSTAINABLE
attached cork
underlayment



100% waterproof

100% resistente al agua - 100% resistente all'acqua -
100% à prova d'água



Extremely stable

Extremadamente estable - Estremamente stabile -
Extremamente estável



No acclimatisation necessary

No necesita aclimatación - Non necessita di
acclimatazione - Não precisa de aclimatização



Easy to install

Fácil de instalar - Facile da installare - Fácil de instalar



Installation on any surface

Instalación sobre cualquier superficie - Può essere installato su
ogni superficie esistente - Instalação em qualquer superfície



Reduces noise

Reducción de ruido - Riduce il rumore - Amortecimento
acústico



Wear resistant

Resistencia al desgaste - Resistenza all'usura -
Resistência a riscos



Pet proof

A prueba de mascotas - Ideale per chi ha animali
domestici - À prova de animais domésticos



Electrostatic performance

Antiestático - Performance elettrostatica - Boa
propriedade eletrostática



Ideal for underfloor heating & cooling

Conveniente para calefacción y refrigeración por suelo radiante -
Adatto a riscaldamento a pavimento e raffreddamento -
Adequado para arrefecimento e aquecimento por piso radiante

Floors with attitude

SurPlus brings you eccentric and bold floors for demanding locations such as shops, offices, and public buildings. Built to last, for high traffic residential and commercial use.

Dare to be different.

SUR-PLUS

Matching your projects


PLANKS

1220 x 183 mm

 5,00 mm
  0,55 mm
  12 pcs
2,68 m²
± 22 kg

PLANKS

1220 x 127 mm

 5,00 mm
  0,55 mm
  14 pcs
2,17 m²
± 18 kg





PLINTH 70 MD10 4047

NAVYTEC 47

50 RLVE 4047



NAVYTEC 83

50 RLVE 4083



PLINTH 70 MD10 3955

NOBLE OAK 55

50 RLV 3955





NOBLE OAK 14 50 RLV 3914



GRAPHIC 97
50 RLV 3897



GRAPHIC 93
50 RLV 3893



PLINTH 70 MD10 3673

ELEGANCE OAK 73


50 RLV 3673



PLINTH 70 MD10 3676
70 QRIO 3676

ELEGANCE OAK 76

50 RLV 3676

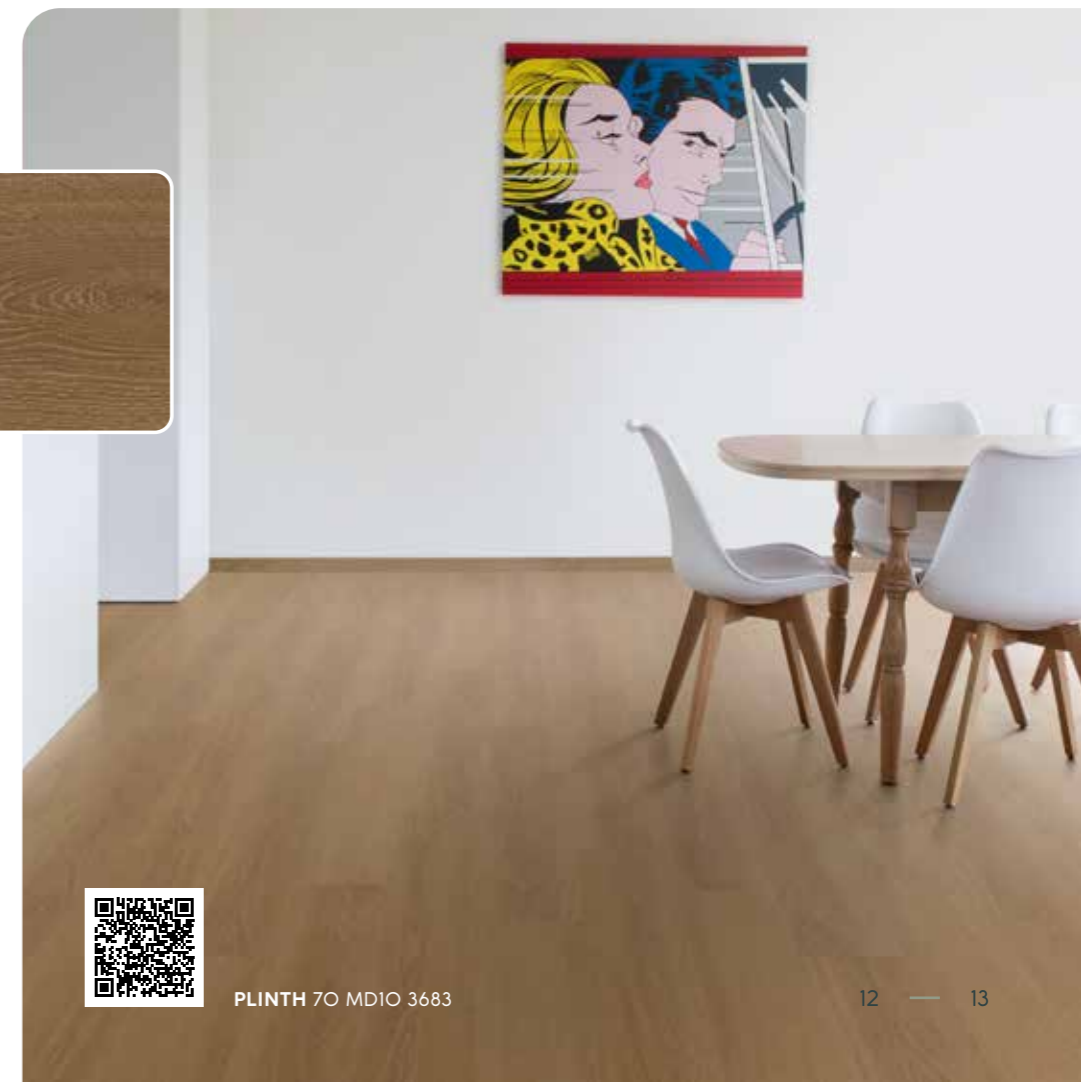

ELEGANCE OAK 83

50 RLV 3683



PLINTH 70 MD10 3683



GRAPHIC 93 50 RLV 3893



PLINTH 70 MD10 3585

ROYAL WALNUT 85

50 RLV 3585



INDUSTRY OAK 94

50 RLV 3794




PLINTH 70 MD10 3794
70 QRIO 3794



INDUSTRY OAK 74

50 RLV 3774

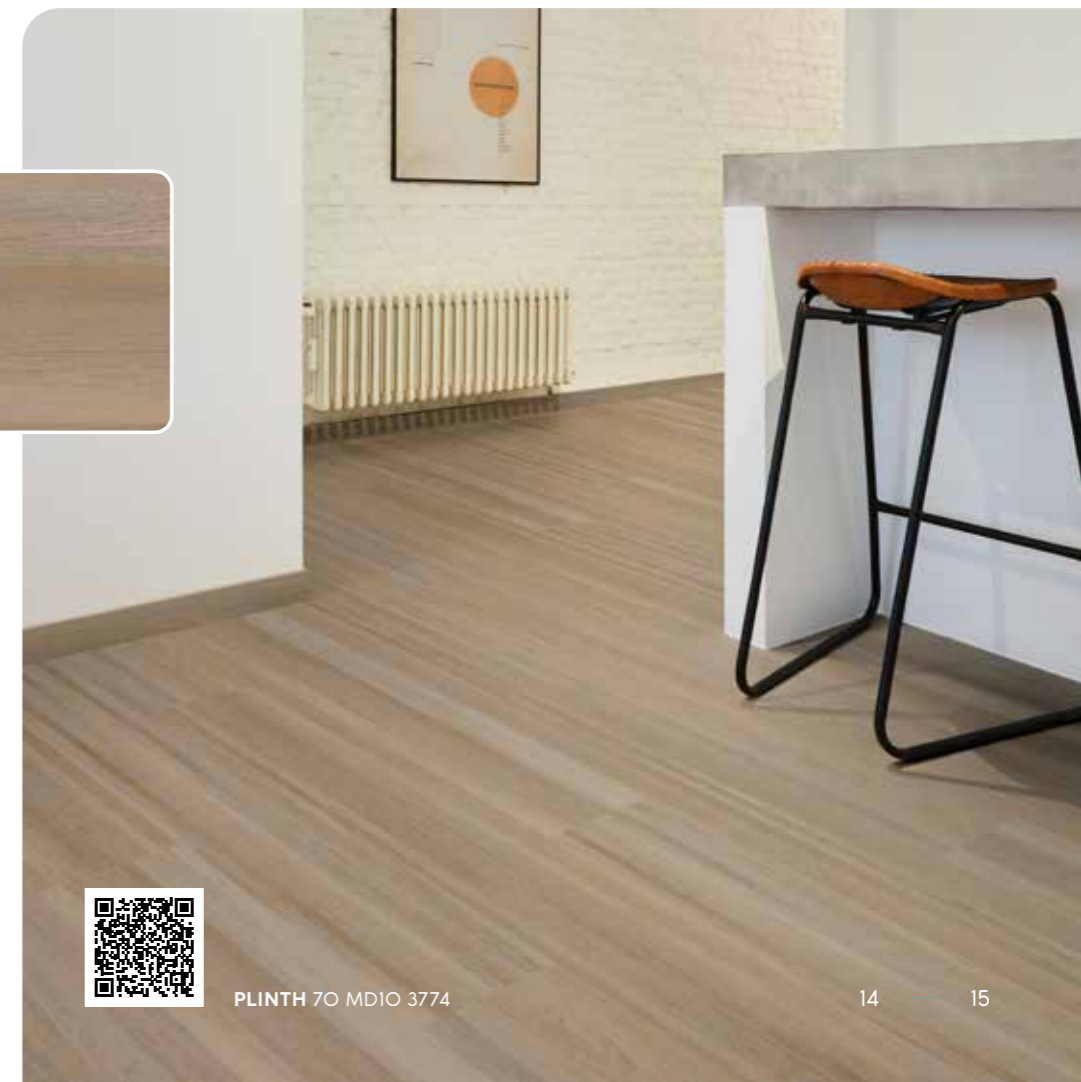

PLINTH 70 MD10 3774



PLINTH 70 MD10 3914



NOBLE OAK 14
50 RLV 3914

Accessories

Paintable skirtings

Our paintable skirtings are 100% waterproof and shock resistant.



CASTLE

14 cm 1.8 cm 2 m
70 PSK2000-1

HIGH

10 cm 1.3 cm 2.3 m
70 PSK2300-3

COVER

10 cm 2 cm 2 m
70 PSK2000-2

← Max. 1.3 cm

MIDDLE

6.5 cm 1.3 cm 2.3 m
70 PSK2300-2

LOW

4 cm 1 cm 2.3 m
70 PSK2300-1

Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof and shock resistant.



.... = Matching design reference

HIGH MODERN

8 cm 1.5 cm 2.4 m
70 HDIO

MODERN

5.8 cm 1.3 cm 2.4 m
70 MDIO

QUARTER ROUND

1.8 cm 1.8 cm 2.4 m
70 QRIO

MULTI PROFILE

4.2 cm 2 cm 4.2 cm 2.4 m
70 MPIO

Different options:

- T-Molding
- Reducer

Installation

Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website. www.coretecfloors.com



Maintenance

The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



Technical specifications

LEVEL OF USE

Classe d'uso / Clasificación de uso /
Classe de utilização
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Fantasia geometriche / Características
geométricas / Características geométricas
Conform (ISO 24337)

WEAR RESISTANCE

Resistenza all'usura / Resistencia al desgaste /
Resistência ao desgaste
Pass 5000 cycles (EN 13329 Annex E)

CASTOR CHAIR RESISTANCE

Resistenza alle sedie con ruote / Resistencia
a sillas con ruedas / Resistência a cadeira
de rodas
Pass 25000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG

Effeto furniture leg / Efecto de la pata de un
mueble / Efeito da perna do móvel
No visible change (EN 1658)

RESIDUAL INDENTATION

Indentazione residua certificata / Huella
residual / Recuo Residual
 ≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Resistenza alle macchie / Resistencia al
manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Chiusura perfetta con sistema a click /
Resistencia a la tracción / Força de encaixe
 $LS \geq 2.0$ / $SS \geq 3.5$ (EN 24334)

DIMENSIONAL STABILITY

Stabilità dimensionale / Estabilidad
dimensional / Estabilidade dimensional
Pass $\leq 0.25\%$ (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Resistenza alla luce / Solidez del color a luz
artificial / Resistência da cor à luz
> grade 6 (ISO 105-B02)

IMPACT SOUND REDUCTION

Isolamento acustico / Aislamiento acústico /
Isolamento acústico
 $\Delta L_w = 17$ dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Classe Formaldeide / Emisión formaldehído /
Classificação formaldeído
E1 (EN 717-1)

FIRE CLASSIFICATION

Classe di resistenza al fuoco / Resistencia al
fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Coefficiente dinamico di attrito / Coeficiente de
fricción / Coeficiente de atrito
DS - RIO (EN 13893 - DIN 51130)

UNDERFLOOR HEATING

Riscaldamento a pavimento / Calefacción por
suelo radiante / Aquecimento por piso radiante
Suitable

ELECTROSTATIC PERFORMANCE

Performance elettrostatica / Rendimiento
antiestático / Acumulação de cargas eletrostáticas
 ≤ 2 kV (EN 1815)

THERMAL RESISTANCE

Resistenza al calore / Aislamiento térmico /
Isolamento térmico
 0.0318 m²-K/W (EN 12667)

Name	SQ Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M ² / box	± Weight box (kg)
Navytec 47	5O RLVE 4047	1220	127	5	•	•	14	2.17	18
Navytec 83	5O RLVE 4083	1220	127	5	•	•	14	2.17	18
Royal Walnut 85	5O RLV 3585	1220	183	5			12	2.68	22
Elegance Oak 73	5O RLV 3673	1220	183	5			12	2.68	22
Elegance Oak 76	5O RLV 3676	1220	183	5			12	2.68	22
Elegance Oak 83	5O RLV 3683	1220	183	5			12	2.68	22
Industry Oak 94	5O RLV 3794	1220	183	5			12	2.68	22
Industry Oak 74	5O RLV 3774	1220	183	5			12	2.68	22
Graphic 97	5O RLV 3897	1220	183	5			12	2.68	22
Graphic 93	5O RLV 3893	1220	183	5			12	2.68	22
Noble Oak 55	5O RLV 3955	1220	183	5			12	2.68	22
Noble Oak 14	5O RLV 3914	1220	183	5			12	2.68	22



It's in our *cove* to adore nature


Our commitments from us to you.

-  **Choose me once, love me for life**
We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.
-  **Breathe healthy air**
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.
-  **Sustainable cork underlay**
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.
-  **We can prove it**
Don't take our word for it, look at the proof! COREtec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.
-  **Second Life**
So you're changing your floor? Why not give the old COREtec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.
-  **Do your bit for forest conservation**
There is no wood in a COREtec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.



COREtec® floors are
that good, somebody else
can re-*enjoy* it.

Learn how your COREtec® floor gets a second life.

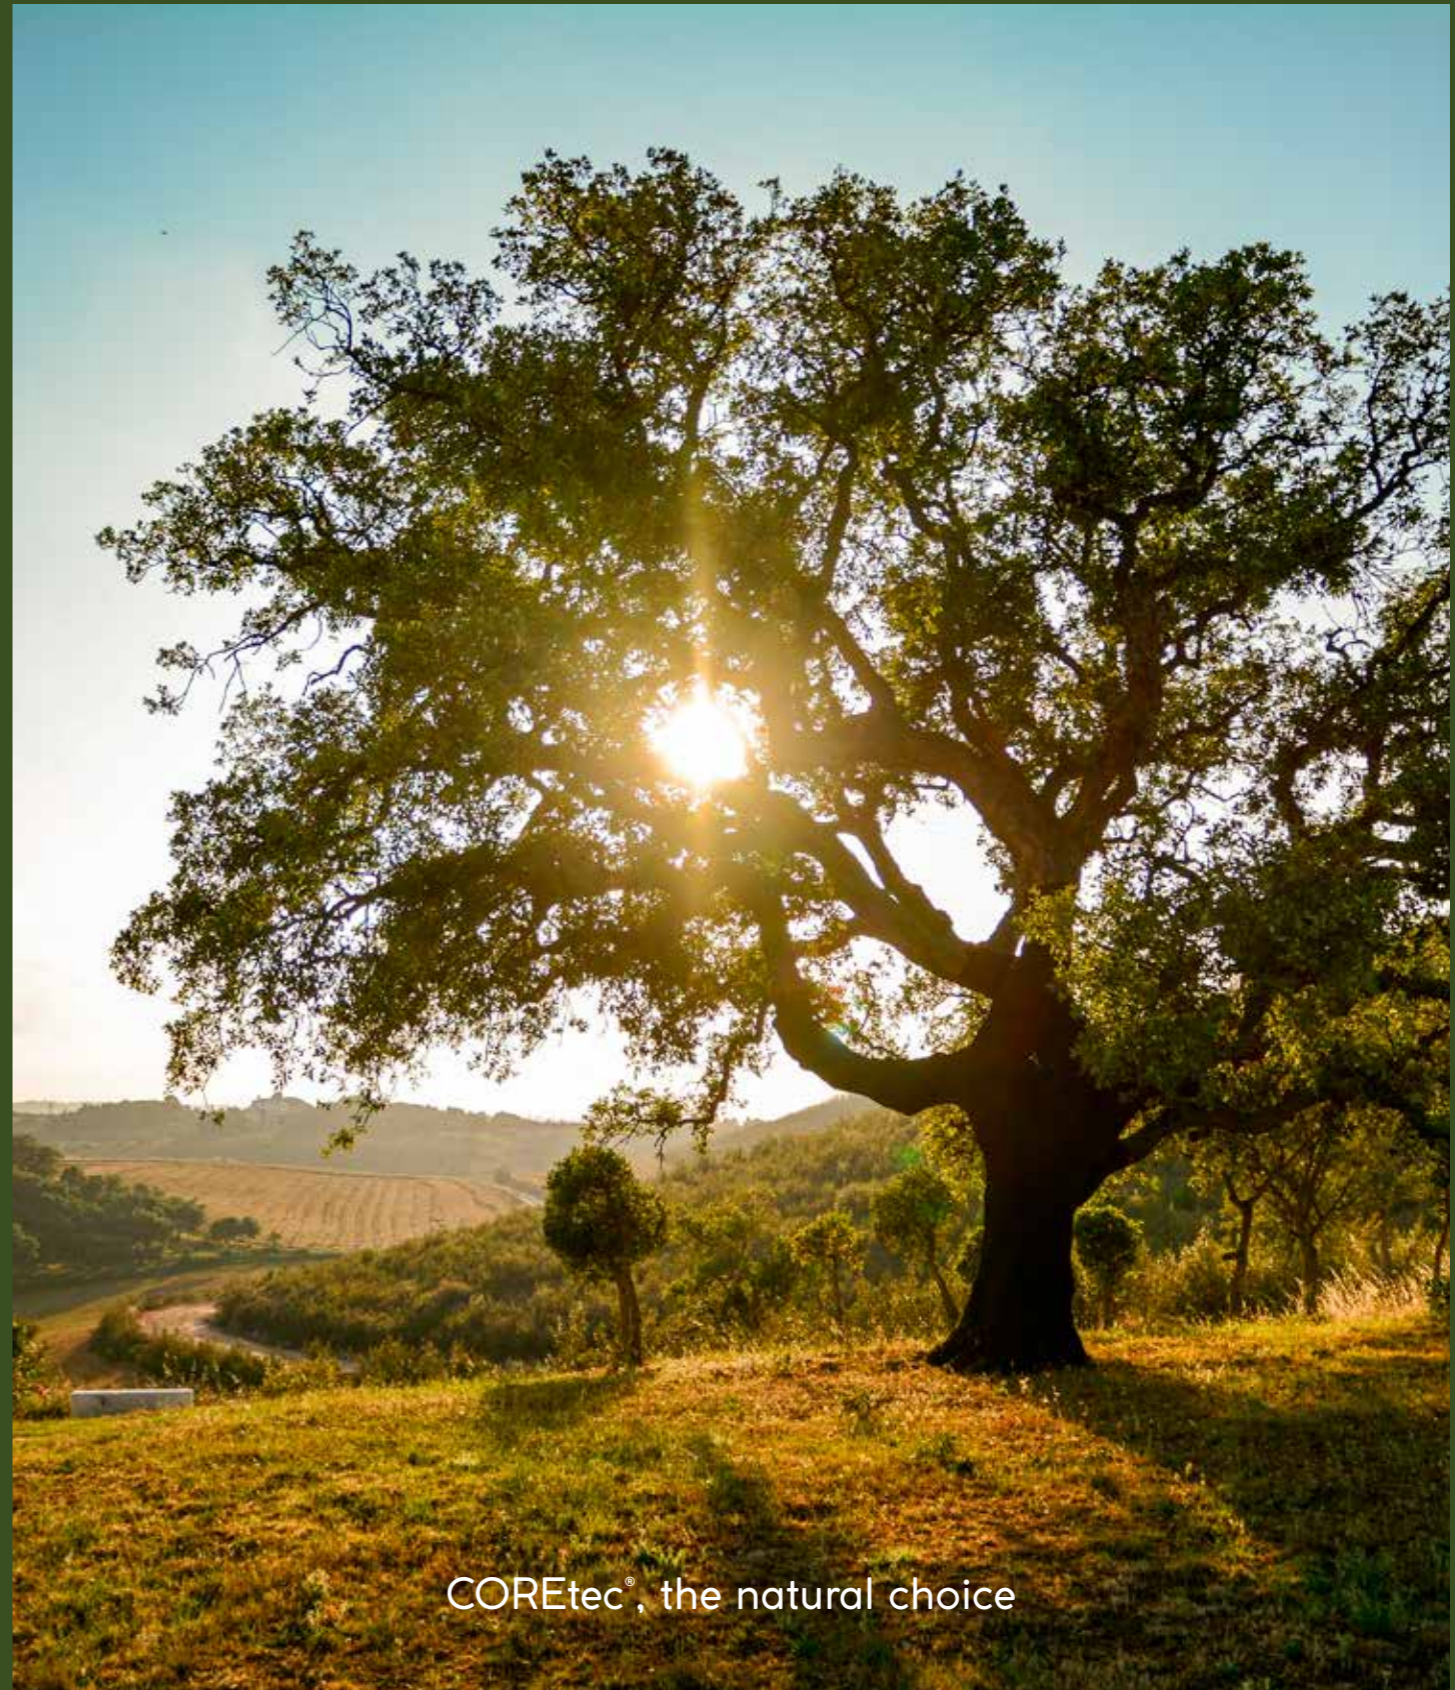

COREtec®, the natural choice



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
 Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
 Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
 Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.

COREtec[®]
FLOORS



Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be · www.coretecfloors.com