



# General info Flexile



## Plank

1228 X 188 mm

Forest - Lumber - Desert - Timber - Acorn - Meadow



## Herringbone

678 X 113 mm

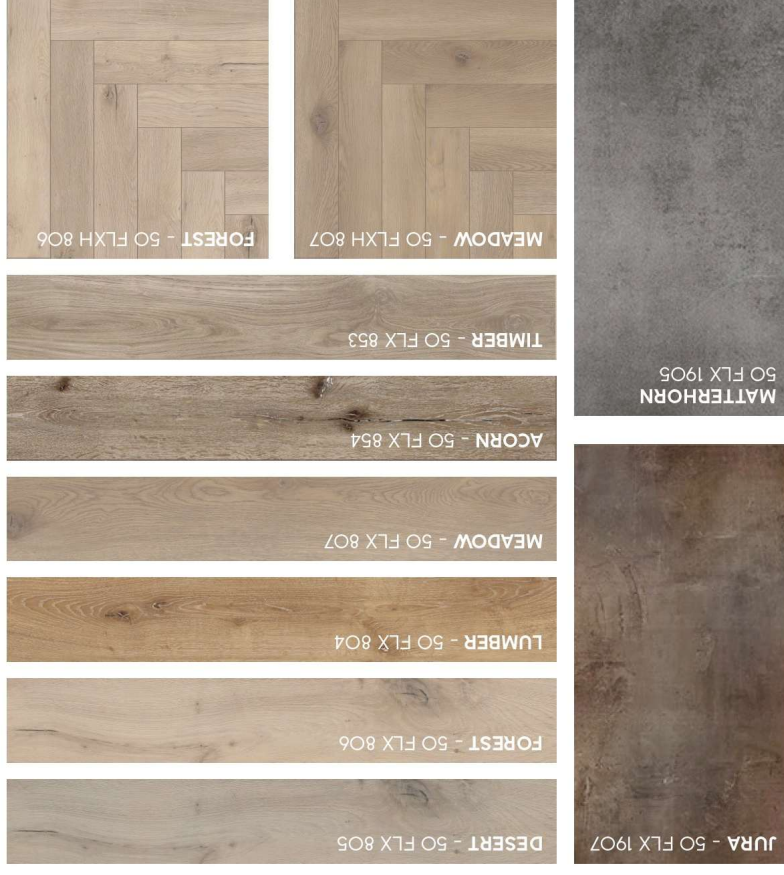
Forest - Meadow



## Tile

914,4 X 457,2 mm

Matterhorn - Jura



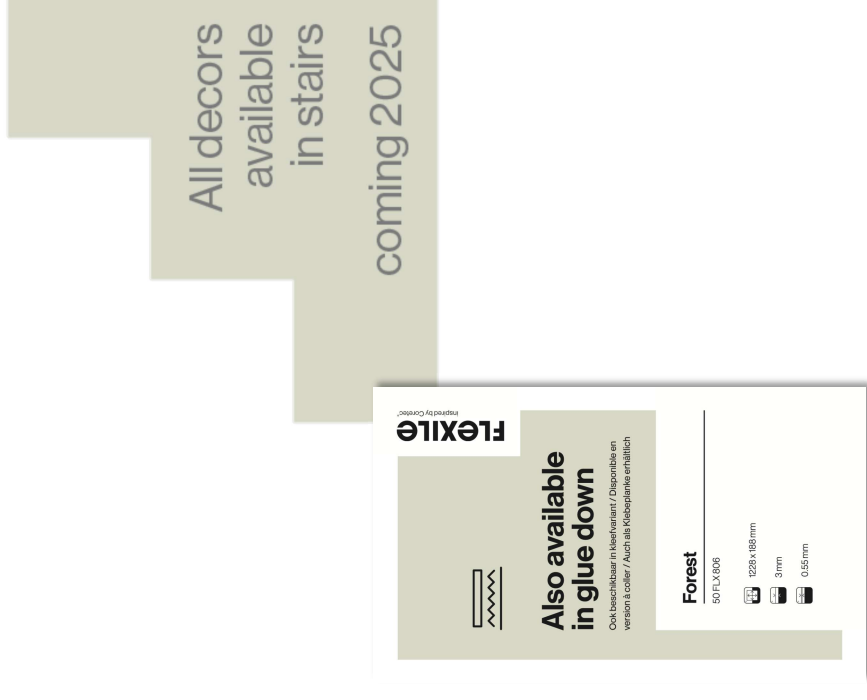
**3,00 mm**  
EN ISO 24346





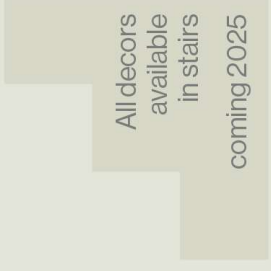
**0,55 mm**  
EN ISO 24340

# Collection

- 1<sup>st</sup> phase: 10 Naturals decors, **launch Q2**
- 2<sup>nd</sup> phase: add-ons Authentics decors
- Availability in Stairs
  - Update Stairs collection at a later stage:  
all Flexile decors available in Stairs
  - Dates TBC
- **POS**
  - Label sets
  - Flexile swatch (sample swatch available at BAU)
  - Separate POP board



# Technical info Flexile

<b>Level of use</b> 23 / 33 / 42 (EN ISO 10874)	<b>Dimensional stability</b> Pass $\leq 0.25\%$ (EN ISO 23999)	<b>Thermal resistance</b> 0.0098 m <sup>2</sup> -K/W (ISO 8302)	<b>10 YEARS</b> 10 year warranty commercial
<b>Geometrical characteristics</b> Compliant (ISO 24342)	<b>Colour fastness to light</b> $\geq$ grade 7 (ISO 105-B02)	<b>Curling after exposure to heat</b> $\leq 0.2$ mm (EN ISO 23999)	
<b>Wear resistance</b> Pass 5000 cycles (EN 13329 Annex E)	<b>Impact sound reduction</b> $\Delta L_w = 2$ dB (ISO 10140-3 / EN 717-2)	<b>VOC Emissions</b> Under detection limits (EN 16516)	
<b>Castor chair resistance</b> Pass 25000 cycles (ISO 4918)	<b>Formaldehyde emission class</b> E1 (EN 16516)	<b>Content of Pentachlorophenol</b> $< 0.02$ mg/kg (EN 12673)	
<b>Effect of furniture leg</b> No visible change (EN 16581)	<b>Fire classification</b> Bfl - S1 (EN 13501-1)	<b>Chemical resistance</b> Excellent resistance (EN ISO 16987)	
<b>Residual indentation</b> $\leq 0.10$ mm (EN ISO 24343-1)	<b>Slip resistance</b> DS - R10 (EN 13893 - DIN 51130)	<b>Underfloor heating</b> Suitable (see: Underfloor Heating Guidelines)	
<b>Resistance to staining</b> 5 (no visible change) (EN 438-2)	<b>Electrostatic performance</b> $\leq 2$ kV (EN 1815)		